




TWIN CLEVIS LINKS - ZINC PLATED




Chain Size in Inches	Working Load Limit in Lbs.	Weight Each in Lbs.	Dimensions in Inches							
			A	B	C	D	F	G	H	K
1/4 in. - 5/16 in.	4700	0.3	0.47	2.49	1.55	0.38	1.32	0.44	0.935	0.5
3/8 in.	6600	0.42	0.53	2.81	1.81	0.44	1.53	0.5	1	0.56
7/16 in. - 1/2 in.	11250	0.96	0.65	3.62	2.31	0.56	1.91	0.63	1.31	0.81

Never Exceed Working Load Limit

QUICK LINKS - ZINC PLATED

Size	Working Load Limit in Lbs.	Approx. Weight Each in Lbs.	Dimensions In Inches			
			A	B	C	D
1/8 in.	220	0.02	0.19	1.45	0.39	1.19
3/16 in.	660	0.05	0.25	2.06	0.5	1.69
1/4 in.	880	0.08	0.31	2.38	0.56	1.88
5/16 in.	1760	0.18	0.38	2.94	0.69	2.31
3/8 in.	2200	0.23	0.44	3.19	0.69	2.44
1/2 in.	3300	0.52	0.56	4.25	0.94	3.25

Never Exceed Working Load Limit






SNAP HOOK - TYPE 316 SS

Size (A)	B	C	D	E	W.L.L. (lbs.)	Wt. Ea. (lbs.)
3/16"	3/16"	5/16"	2"	1/4"	120	0.04
1/4"	9/32"	5/16"	2-3/8"	5/16"	180	0.06
5/16"	3/8"	7/16"	3-1/8"	3/8"	280	0.15
3/8"	7/16"	5/8"	4"	9/16"	400	0.27
1/2"	3/4"	15/16"	6-3/8"	1"	900	0.78

Never Exceed Working Load Limit

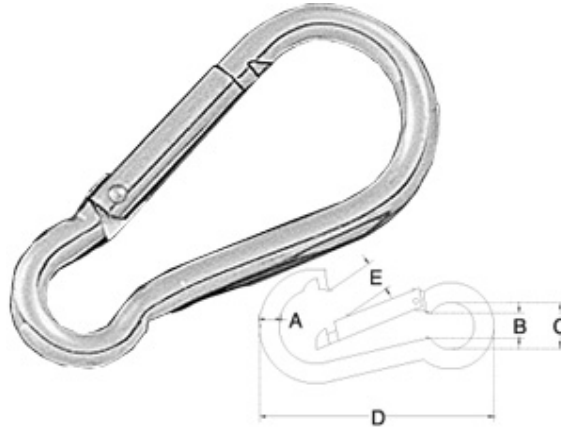

QUICK LINKS - TYPE 316 SS

Size (A)	B	C	D	W.L.L. (lbs.)	Wt. Ea. (lbs.)
1/8"	1-1/8"	3/8"	7/32"	300	0.02
3/16"	1-1/2"	1/2"	1/4"	950	0.05
1/4"	1-3/4"	9/16"	5/16"	1500	0.08
5/16"	2-1/4"	3/4"	3/8"	2400	0.18
3/8"	2-3/4"	7/8"	1/2"	4000	0.33
1/2"	3-1/4"	15/16"	9/16"	5500	0.55

Never Exceed Working Load Limit

